


 Do not cut off the connector.
This will cancel the warranty.

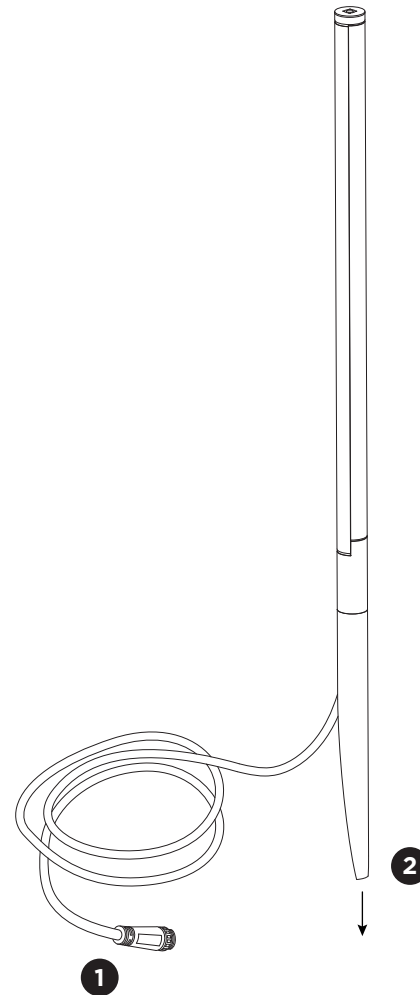


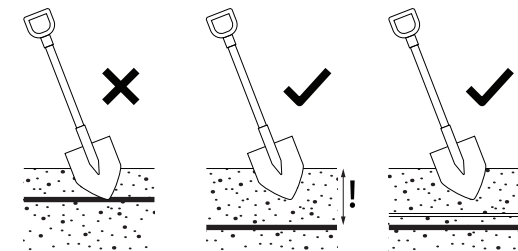
DIMENSIONS



MOUNTING INSTRUCTION


- 1 POWER CONNECTION**
Connect to plug & play driver with a straight connector or T-connector.
For detailed information to the plug & play system see next page.
- 2** Put the fixture in the soil.


 Place the cables deep enough in the ground or protect them with a cover/tube to avoid damage due to a shovel.



PLUG & PLAY SYSTEM


luminaire power	max. cable length in relation to distance to first luminaire								max. cable length
	≤1,0m	≤2,5m	≤5,0m	≤7,5m	≤10,0m	≤15,0m	≤20,0m	≤30,0m	
15W	50m	50m	50m	50m	50m	50m	50m	50m	
30W	50m	50m	50m	50m	50m	50m	36m	6m	
45W	50m	50m	50m	42m	34m	20m	4m	-	
60W	44m	40m	32m	26m	18m	2m	-	-	

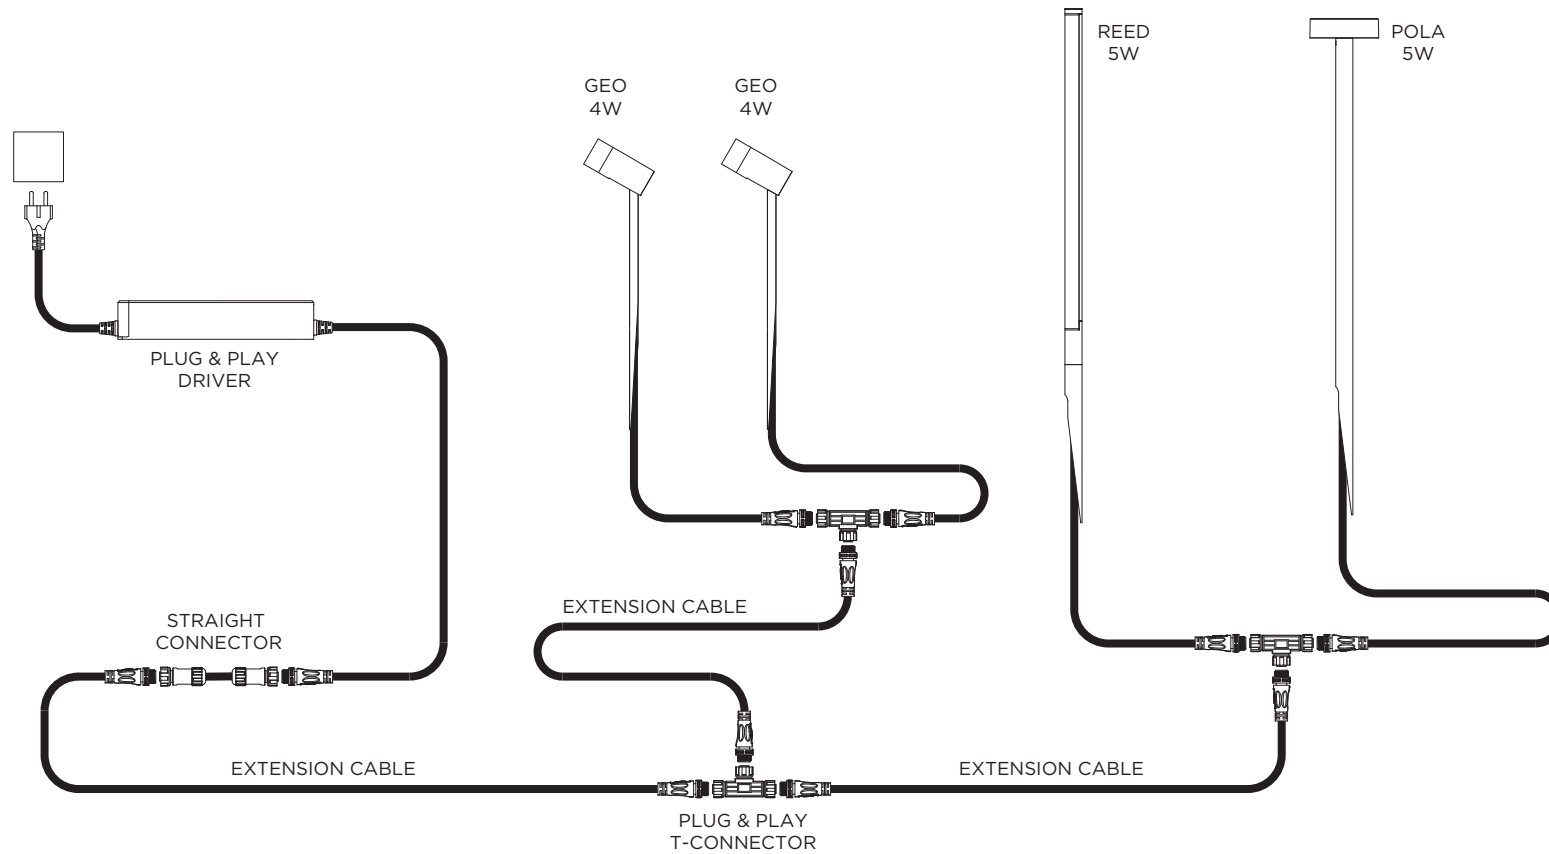

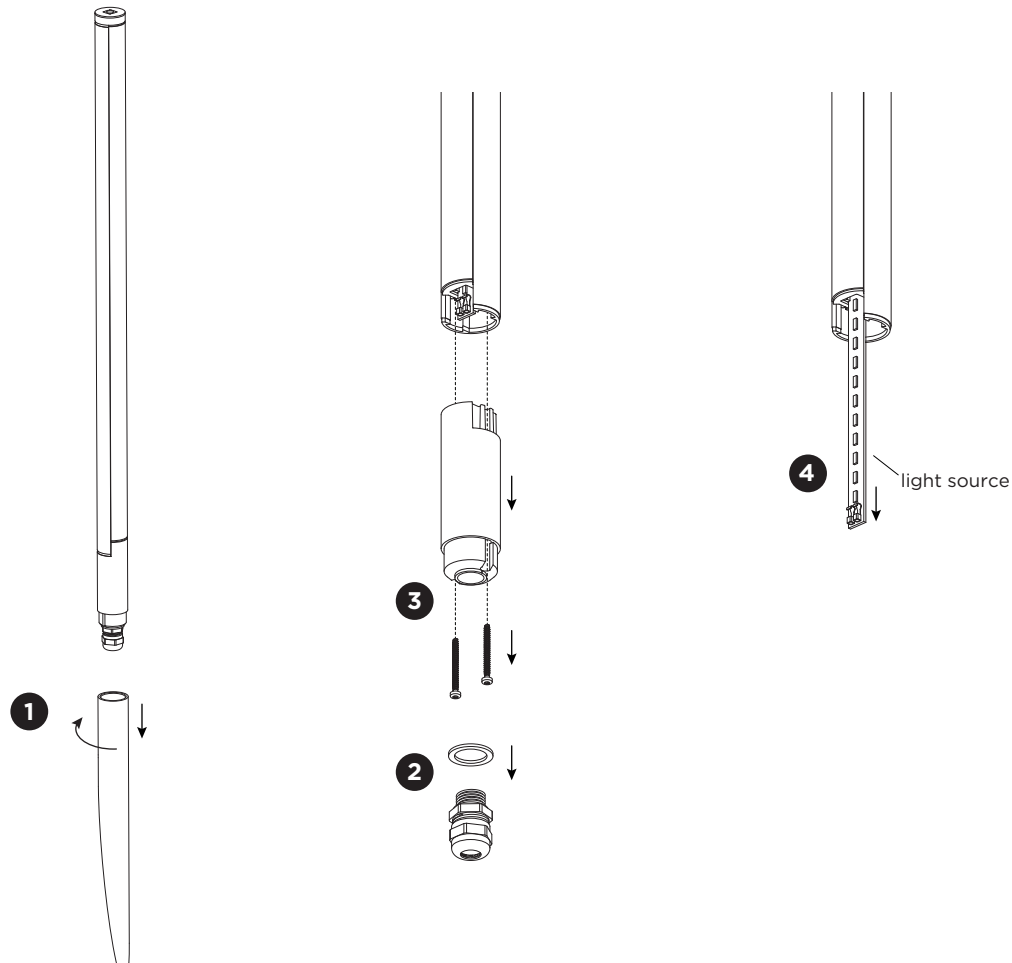

DISMOUNTING AND RECYCLING INSTRUCTIONS Light source

- 1** Remove the spike by unscrewing it.
- 2** Unscrew the cable gland and remove the washer.
- 3** Remove the cover by unscrewing the screws.
- 4** Disconnect the wires and remove the light source by pulling it out.



The light source is replaceable by Wever & Ducreé or by a professional with explicit authorisation. For more information please contact your local Wever & Ducreé customer service point.



This luminaire contains a light source with the energy class F.