


## COB 24V-12W STANDARD IP20

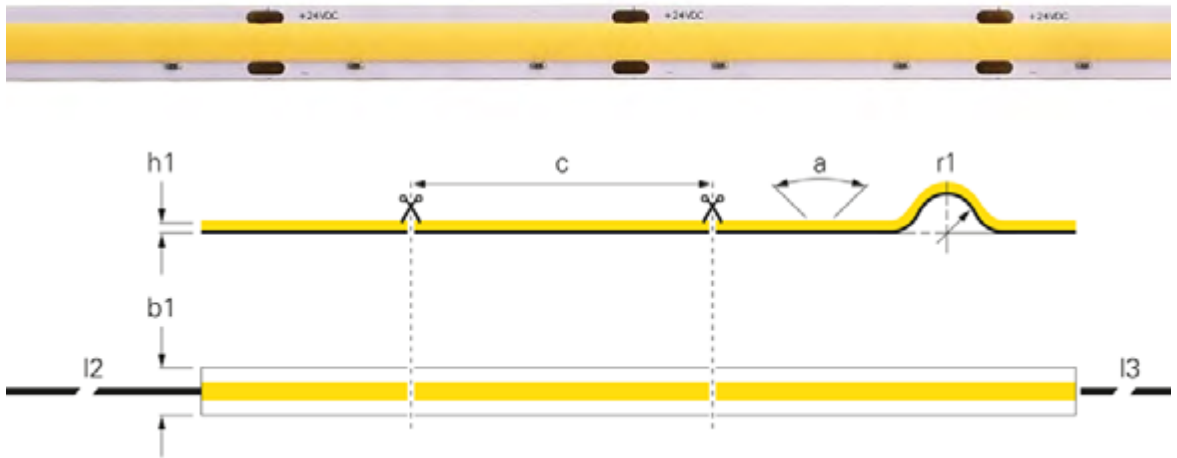

(p) LED Distance	2.08 mm	Length	5000 mm
(c) Segment Length	50 mm	Rated Input Voltage	24 V/DC
(a) Light Beam Angle	120 Degree	Colour Rendering Index (Ra)	90
(r1) Bending Radius min.	50 mm	Control	Dimmable via optional controller
(h1) Height	2 mm	Working Temperature	-15 to 50 °C
(b1) Width	10 mm	Channels	1
(I2) Primary Cable Length	1 m		
(I3) Secondary Cable Length	1 m		

Article	Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Rated Input 1m	Price
<b>840296</b>	3000 K	89.6 lm/W	1120 lm	12.5 W	<b>€ 159.95</b>
<b>840304</b>	4000 K	94.17 lm/W	1130 lm	12.0 W	<b>€ 159.95</b>

**Aluminium profiles**

In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.