
## COB 24V-16W STANDARD IP20



(p) LED Distance (c) Segment Length (a) Light Beam Angle	1.19 mm 50 mm 120 Degree	Luminous Flux 1m Length Rated Input 1m	660 lm 5000 mm 16.5 W
(r1) Bending Radius min. (h1) Height (b1) Width	50 mm 2.2 mm 10 mm	Rated Input Voltage Control	24 V/DC Dimmable via optional controller
(I2) Primary Cable Length (I3) Secondary Cable Length Luminous Efficiency 1m	1 m 1 m 40 lm/W	Working Temperature Channels	-10 to 60 °C 3



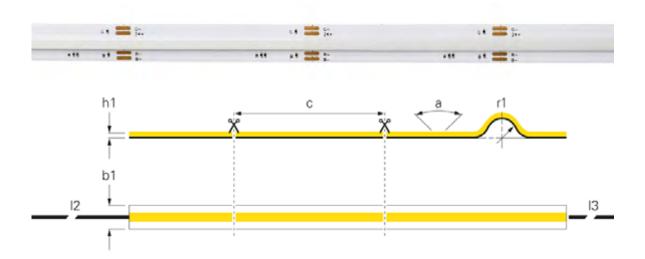

## Lighting design

Interested in our lighting design service? Your contact person will be happy to answer any questions you may have.