




COB 24V-15W PERFORMANCE IP67

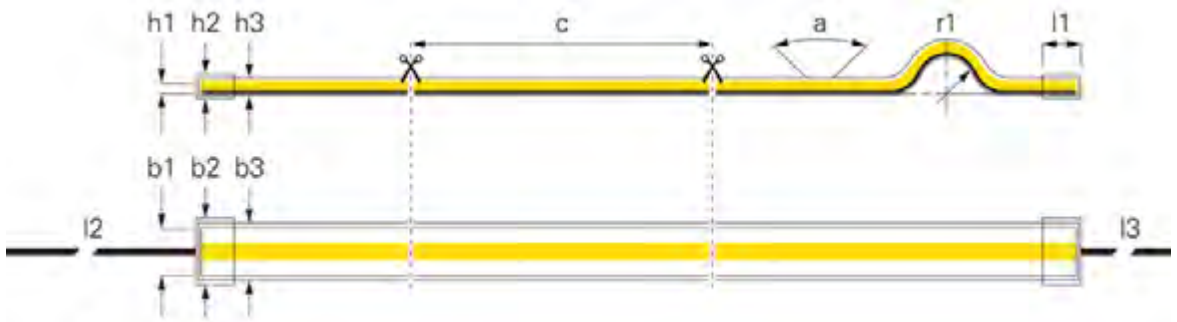

(p) LED Distance	2.08 mm	(l2) Primary Cable Length	1 m
(c) Segment Length	50 mm	(l3) Secondary Cable Length	1 m
(a) Light Beam Angle	180 Degree	Length	5000 mm
(r1) Bending Radius min.	50 mm	Rated Input 1m	15 W
(h1) Height	2 mm	Rated Input Voltage	24 V/DC
(h2) Height End Cap	6 mm	Colour Rendering Index (Ra)	90
(h3) Length Hose	5 mm	Control	Dimmable via optional controller
(b1) Width	10 mm	Type of IP Protection	Silicone
(b2) Width end cap	15 mm	Working Temperature	-15 to 50 °C
(b3) Width hose	14 mm	Channels	1
(l1) Length End Cap	10 mm		

Article	Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Price
840321 3000 K		148.33 lm/W	2225 lm	€ 199.95
840322 4000 K		163.67 lm/W	2455 lm	€ 199.95

**Aluminium profiles**

In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.