





## SMD 12V-7W SHORT CUT IP20

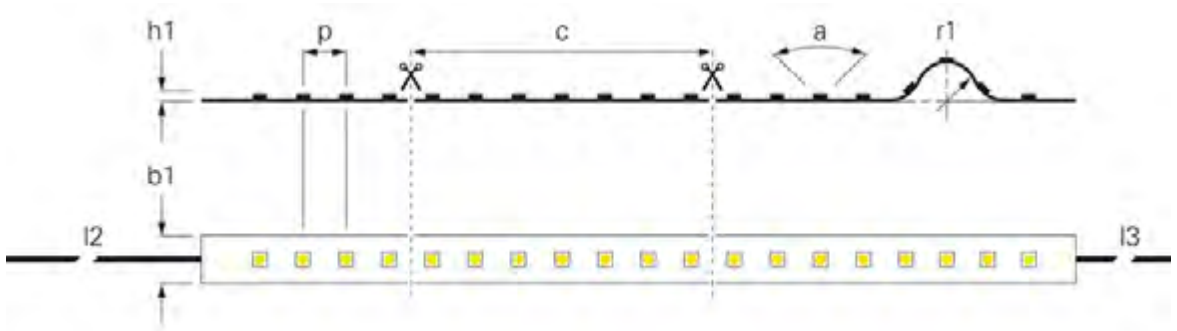

(p) LED Distance	8.33 mm	Length	5000 mm
(c) Segment Length	25 mm	Rated Input Voltage	12 V/DC
(a) Light Beam Angle	120 Degree	Colour Rendering Index (Ra)	90
(r1) Bending Radius min.	20 mm	Control	Dimmable via optional controller
(h1) Height	3 mm	Working Temperature	-15 to 50 °C
(b1) Width	8 mm	Channels	1
(l2) Primary Cable Length	1 m		
(l3) Secondary Cable Length	1 m		

Article	Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Rated Input 1m	EEL	Price
<b>840164</b>	2700 K	81.43 lm/W	570 lm	7.0 W		<b>€ 89.95</b>
<b>840165</b>	3000 K	85.38 lm/W	555 lm	6.5 W		<b>€ 89.95</b>
<b>840166</b>	4000 K	95.71 lm/W	670 lm	7.0 W		<b>€ 89.95</b>
<b>840167</b>	6500 K	90 lm/W	630 lm	7.0 W		<b>€ 89.95</b>



### Aluminium profiles

In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.