





SMD 24V-10W SLIM IP20

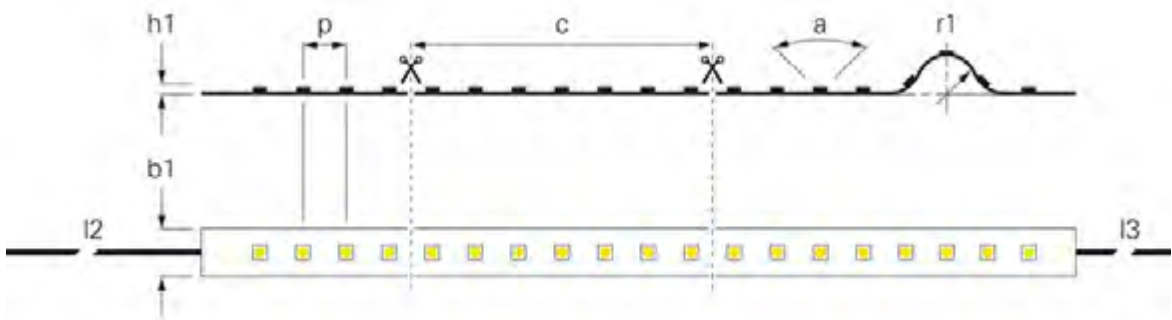

(p) LED Distance	8.33 mm	Length	5000 mm
(c) Segment Length	50 mm	Rated Input Voltage	24 V/DC
(a) Light Beam Angle	120 Degree	Colour Rendering Index (Ra)	90
(r1) Bending Radius min.	20 mm	Control	Dimmable via optional controller
(h1) Height	3 mm	Working Temperature	-15 to 50 °C
(b1) Width	5 mm	Channels	1
(I2) Primary Cable Length	1 m		
(I3) Secondary Cable Length	1 m		

Article	Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Rated Input 1m	Price
840158	2700 K	80 lm/W	680 lm	8.5 W	€ 79.95
840159	3000 K	69.52 lm/W	730 lm	10.5 W	€ 79.95



Aluminium profiles

In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.