




SMD 24V-11W SLIM IP20

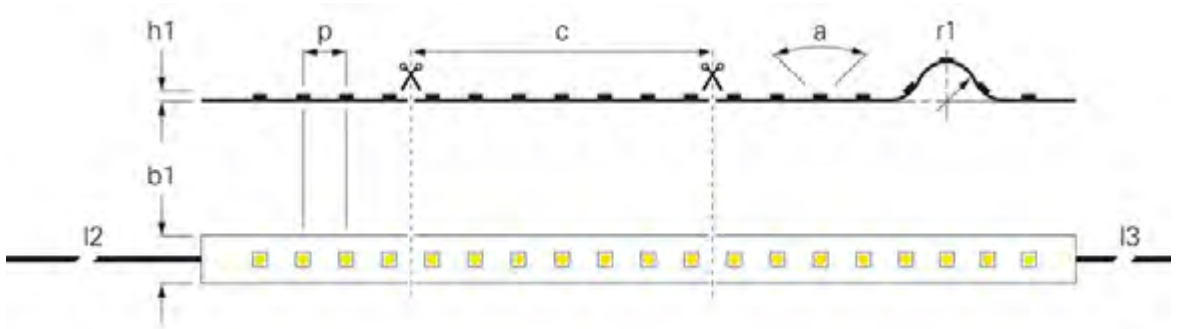

(p) LED Distance	3.75 mm	Length	5000 mm
(a) Light Beam Angle	120 Degree	Rated Input Voltage	24 V/DC
(r1) Bending Radius min.	20 mm	Colour Rendering Index (Ra)	90
(h1) Height	2 mm	Control	Dimmable via optional controller
(b1) Width	4 mm	Working Temperature	-15 to 50 °C
(I2) Primary Cable Length	1 m	Channels	1
(I3) Secondary Cable Length	1 m		

Article	Colour Temperature	(c) Segment Length	Luminous Efficiency 1m	Luminous Flux 1m	Rated Input 1m	Price
840175	2700 K	25 mm	90.45 lm/W	995 lm	11.0 W	€ 169.95
840210	3000 K	33.4 mm	99.09 lm/W	1090 lm	11.0 W	€ 169.95
840267	4000 K	33.4 mm	95.65 lm/W	1100 lm	11.5 W	€ 169.95



Power supply units

You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.