





**SMD 24V-11W CCT SLIM IP20**

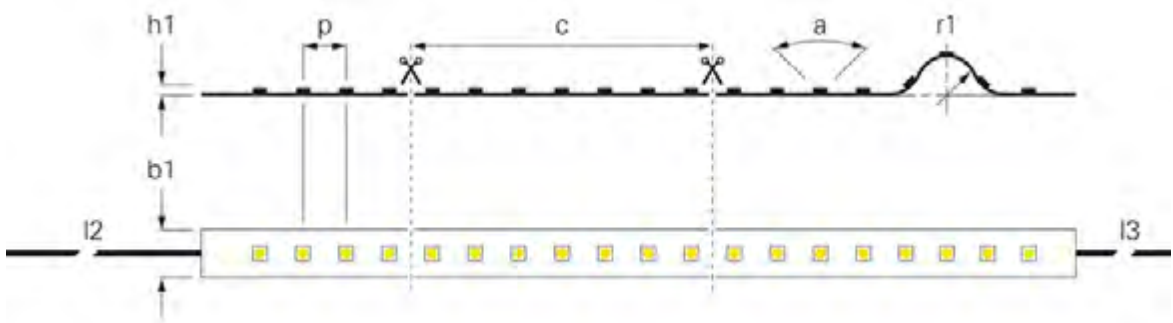

(p) LED Distance	10.2 mm	Luminous Flux 1m	1025 lm
(c) Segment Length	71.4 mm	Length	5000 mm
(a) Light Beam Angle	120 Degree	Rated Input 1m	11 W
(r1) Bending Radius min.	50 mm	Rated Input Voltage	24 V/DC
(h1) Height	1.2 mm	Colour Rendering Index (Ra)	90
(b1) Width	5 mm	Control	Dimmable via optional controller
(l2) Primary Cable Length	1 m	Working Temperature	-10 to 60 °C
(l3) Secondary Cable Length	1 m	Channels	2
Colour Temperature	3000-6500 K		
Luminous Efficiency 1m	93.18 lm/W		

Article                      Colour Temperature                      Price

**840350** WW CW 3000-6500 K **€ 124.95**



**Aluminium profiles**

In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.