



SMD 24V-8W STANDARD IP44

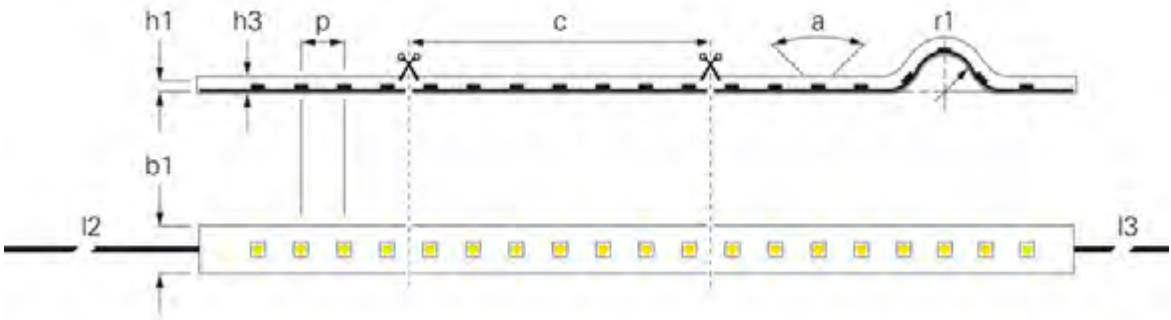

(p) LED Distance	8.33 mm	Colour Temperature	2700-6500 K
(c) Segment Length	50 mm	Luminous Efficiency 1m	105 lm/W
(a) Light Beam Angle	120 Degree	Luminous Flux 1m	1470 lm
(r1) Bending Radius min.	50 mm	Length	5000 mm
(h1) Height	2 mm	Rated Input 1m	14 W
(h2) Height End Cap	8 mm	Rated Input Voltage	24 V/DC
(h3) Length Hose	2.6 mm	Colour Rendering Index (Ra)	90
(b1) Width	10 mm	Control	Dimmable via optional controller
(b2) Width end cap	14.7 mm	Type of IP Protection	Silicone
(b3) Width hose	10 mm	Working Temperature	-10 to 40 °C
(l1) Length End Cap	19.5 mm	Channels	2
(l2) Primary Cable Length	1 m		
(l3) Secondary Cable Length	1 m		

Article Colour Temperature Price

840379 2700-6500 K **€ 219.95**



Aluminium profiles

In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.