





## SMD 24V-11W STANDARD IP20

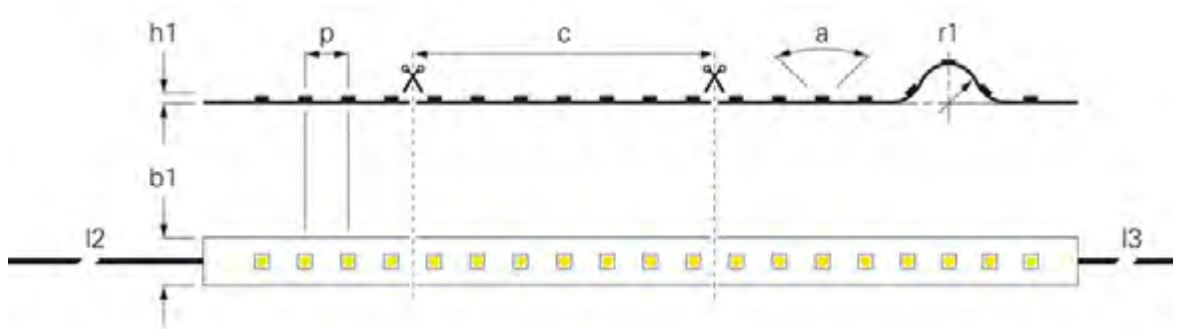

(p) LED Distance	8.33 mm	Luminous Flux 1m	500 lm
(c) Segment Length	50 mm	Length	5000 mm
(a) Light Beam Angle	110 Degree	Rated Input 1m	11 W
(r1) Bending Radius min.	20 mm	Rated Input Voltage	24 V/DC
(h1) Height	2 mm	Colour Rendering Index (Ra)	60
(b1) Width	5 mm	Control	Dimmable via optional controller
(l2) Primary Cable Length	1 m	Working Temperature	-15 to 50 °C
(l3) Secondary Cable Length	1 m	Channels	3
Luminous Efficiency 1m	45.45 lm/W		

Article Price

**840276**  **€ 109.95**



### Power supply units

You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.