




SMD 24V-15W STANDARD IP67

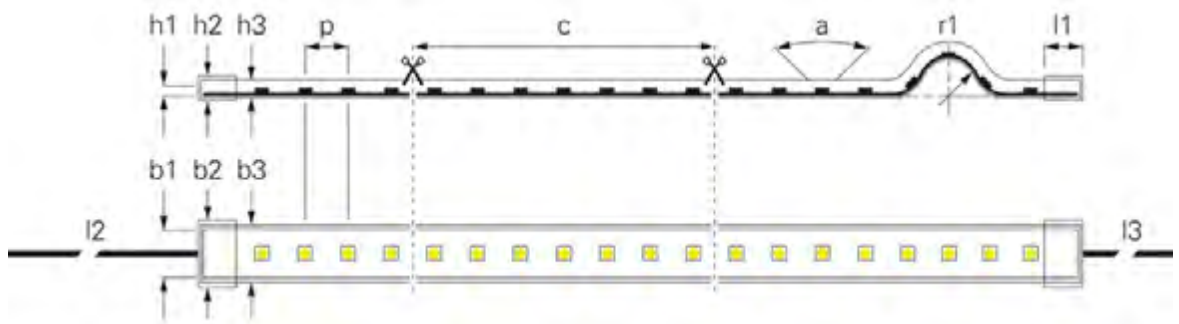

(p) LED Distance	16.66 mm	Colour Temperature	3000 K
(c) Segment Length	100 mm	Luminous Efficiency 1m	49 lm/W
(a) Light Beam Angle	120 Degree	Luminous Flux 1m	735 lm
(r1) Bending Radius min.	50 mm	Length	5000 mm
(h1) Height	1.7 mm	Rated Input 1m	15 W
(h2) Height End Cap	5.2 mm	Rated Input Voltage	24 V/DC
(h3) Length Hose	4.2 mm	Colour Rendering Index (Ra)	80
(b1) Width	10 mm	Control	Dimmable via optional controller
(b2) Width end cap	14.8 mm	Type of IP Protection	Silicone hose
(b3) Width hose	12.6 mm	Working Temperature	-15 to 50 °C
(l1) Length End Cap	10 mm	Channels	4
(l2) Primary Cable Length	1 m		
(l3) Secondary Cable Length	1 m		

Article Price

840239  **€ 174.95**



Power supply units

You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.