





## SMD 24V-16W RGBNW STANDARD IP20

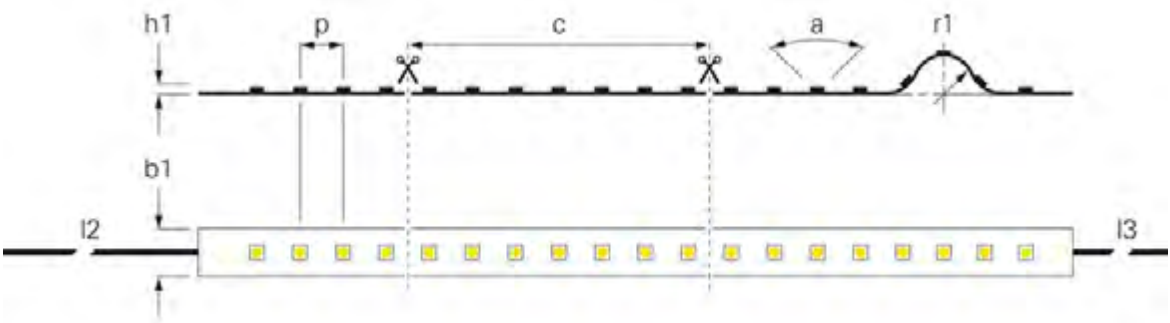

(p) LED Distance	16.66 mm	Luminous Flux 1m	775 lm
(c) Segment Length	62.5 mm	Length	5000 mm
(a) Light Beam Angle	120 Degree	Rated Input 1m	16.5 W
(r1) Bending Radius min.	50 mm	Rated Input Voltage	24 V/DC
(h1) Height	2 mm	Colour Rendering Index (Ra)	80
(b1) Width	10 mm	Control	Dimmable via optional controller
(I2) Primary Cable Length	1 m	Working Temperature	-10 to 60 °C
(I3) Secondary Cable Length	1 m	Channels	4
Colour Temperature	4000 K		
Luminous Efficiency 1m	46.97 lm/W		

Article Price

**840353** RGB NW **€ 149.95**



### Aluminium profiles

In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.