





SMD 24V-16W RGBWW STANDARD IP20

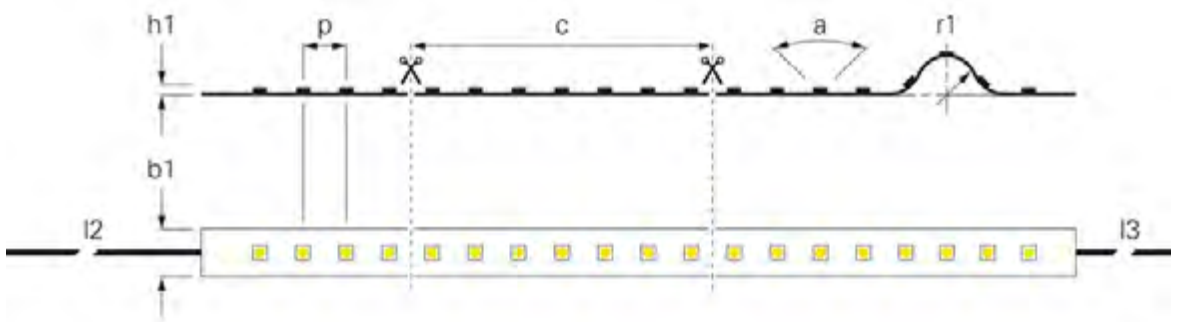

(p) LED Distance	16.66 mm	Luminous Efficiency 1m	51.25 lm/W
(c) Segment Length	100 mm	Luminous Flux 1m	820 lm
(a) Light Beam Angle	120 Degree	Rated Input 1m	16 W
(r1) Bending Radius min.	50 mm	Rated Input Voltage	24 V/DC
(h1) Height	3 mm	Colour Rendering Index (Ra)	80
(b1) Width	10 mm	Control	Dimmable via optional controller
(l2) Primary Cable Length	1 m	Working Temperature	-15 to 50 °C
(l3) Secondary Cable Length	1 m	Channels	4
Colour Temperature	3000 K		

Article		Length	Price
840236		5000 mm	€ 144.95
930517		50000 mm	€ 1299.95



Power supply units

You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.