




### SMD 24V-17W STANDARD IP20

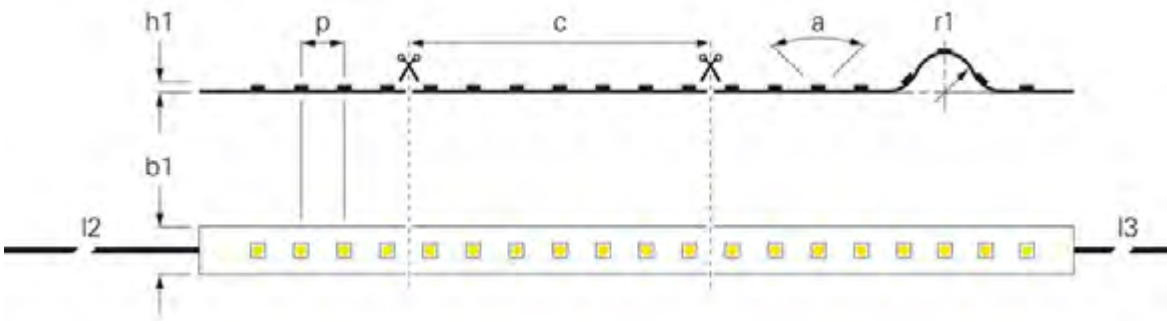


(p) LED Distance	8.33 mm	Luminous Flux 1m	1765 lm
(c) Segment Length	50 mm	Length	5000 mm
(a) Light Beam Angle	120 Degree	Rated Input 1m	17.2 W
(r1) Bending Radius min.	50 mm	Rated Input Voltage	24 V/DC
(h1) Height	2 mm	Colour Rendering Index (Ra)	90
(b1) Width	10 mm	Control	Dimmable via optional controller
(l2) Primary Cable Length	1 m	Working Temperature	-10 to 40 °C
(l3) Secondary Cable Length	1 m	Channels	2
Colour Temperature	2700-6500 K		
Luminous Efficiency 1m	103 lm/W		

Article                      Colour Temperature                      Price

**840378**   WW   CW   2700-6500 K

**€ 199.95**



#### Aluminium profiles

In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.