




SMD 24V-22W POWER IP20

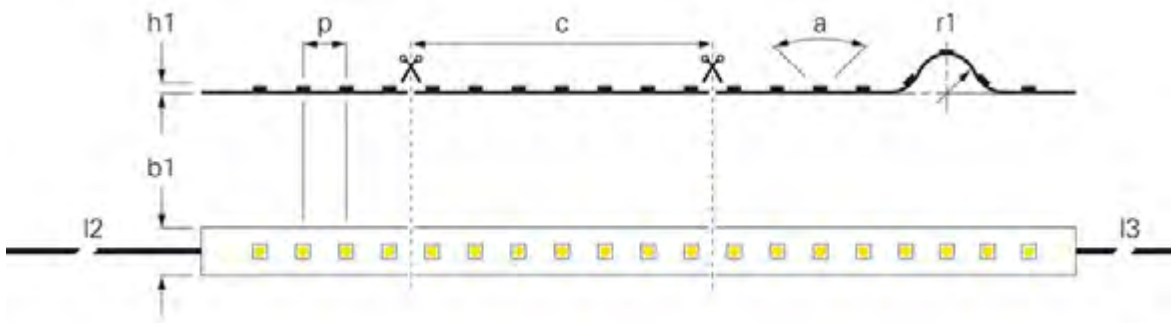

(p) LED Distance	6.25 mm	Length	5000 mm
(c) Segment Length	50 mm	Rated Input 1m	22.5 W
(a) Light Beam Angle	110 Degree	Rated Input Voltage	24 V/DC
(r1) Bending Radius min.	20 mm	Colour Rendering Index (Ra)	90
(h1) Height	2 mm	Control	Dimmable via optional controller
(b1) Width	10 mm	Working Temperature	-15 to 50 °C
(I2) Primary Cable Length	1 m	Channels	1
(I3) Secondary Cable Length	1 m		

Article	Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	EEL	Price
840331	WW 3000 K	114.22 lm/W	2570 lm		€ 249.95
840332	NW 4000 K	125.11 lm/W	2815 lm		€ 249.95



Aluminium profiles

In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.