


SMD 24V-22W RGBW POWER IP20

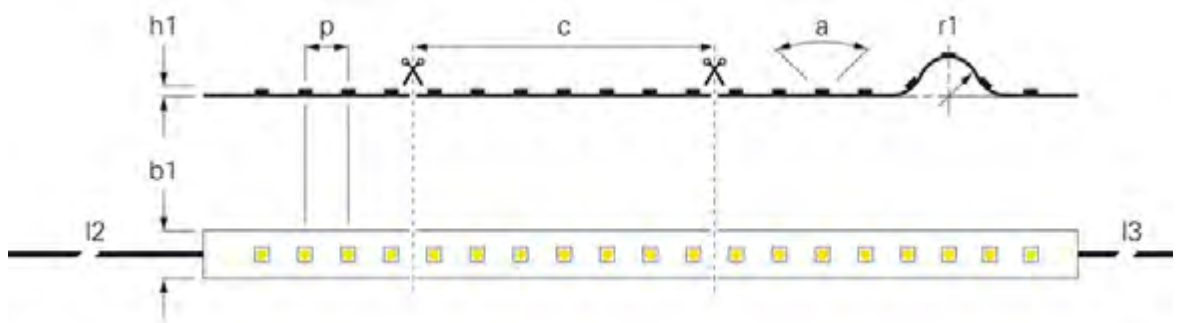

(p) LED Distance	10.4 mm	Length	5000 mm
(a) Light Beam Angle	110 Degree	Rated Input 1m	22 W
(r1) Bending Radius min.	20 mm	Rated Input Voltage	24 V/DC
(h1) Height	2 mm	Colour Rendering Index (Ra)	60
(b1) Width	12 mm	Control	Dimmable via optional controller
(I2) Primary Cable Length	1 m	Working Temperature	-15 to 50 °C
(I3) Secondary Cable Length	1 m		

Article	Colour Temperature	(c) Segment Length	Luminous Efficiency 1m	Luminous Flux 1m	Channels	EEL	Price
840308	3000 K	100 mm	43.41 lm/W	955 lm	4		€ 179.95
840309	4000 K	50 mm	44.77 lm/W	985 lm	4		€ 179.95

**Power supply units**

You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.