





SMD 24V-28W POWER PLUS IP20

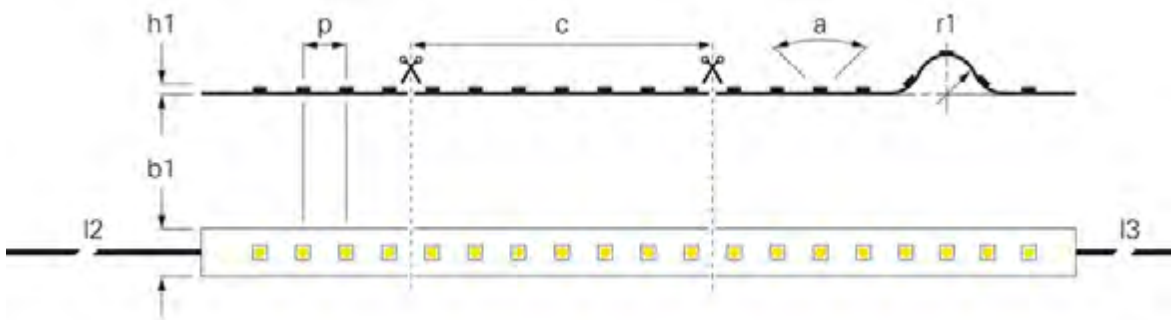

(p) LED Distance	8.33 mm	Luminous Flux 1m	1055 lm
(c) Segment Length	50 mm	Length	5000 mm
(a) Light Beam Angle	120 Degree	Rated Input 1m	28 W
(r1) Bending Radius min.	50 mm	Rated Input Voltage	24 V/DC
(h1) Height	2 mm	Colour Rendering Index (Ra)	60
(b1) Width	12 mm	Control	Dimmable via optional controller
(I2) Primary Cable Length	1 m	Working Temperature	-10 to 60 °C
(I3) Secondary Cable Length	1 m	Channels	3
Luminous Efficiency 1m	37.68 lm/W		

Article Price

840352 **€ 189.95**



Aluminium profiles

In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.