





## SMD 24V-28W POWER PLUS IP44

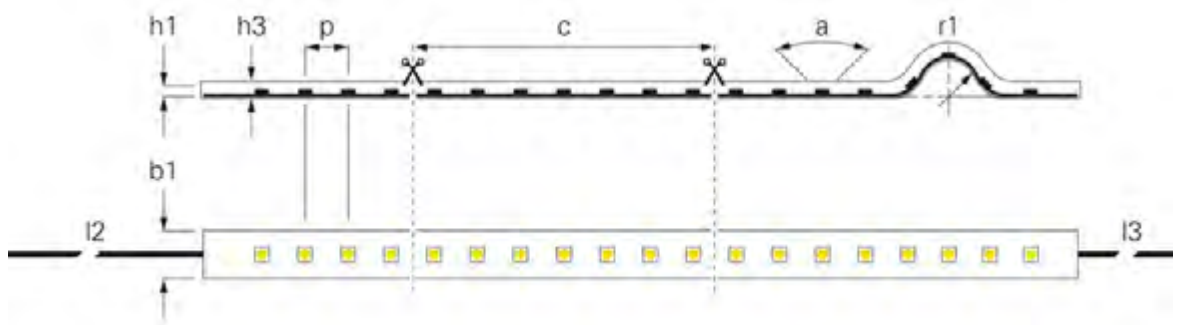

(p) LED Distance	8.33 mm	Luminous Flux 1m	1045 lm
(c) Segment Length	50 mm	Length	5000 mm
(a) Light Beam Angle	120 Degree	Rated Input 1m	27.5 W
(r1) Bending Radius min.	50 mm	Rated Input Voltage	24 V/DC
(h1) Height	1 mm	Colour Rendering Index (Ra)	60
(h3) Length Hose	2 mm	Control	Dimmable via optional controller
(b1) Width	12 mm	Type of IP Protection	Silicone
(b3) Width hose	14 mm	Working Temperature	-10 to 60 °C
(l2) Primary Cable Length	1 m	Channels	3
(l3) Secondary Cable Length	1 m		
Luminous Efficiency 1m	38 lm/W		

Article Price

**840351**  **€ 214.95**



### Power supply units

You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.