





NEON 24V-10W D FLEX LINE SIDE-VIEW IP68

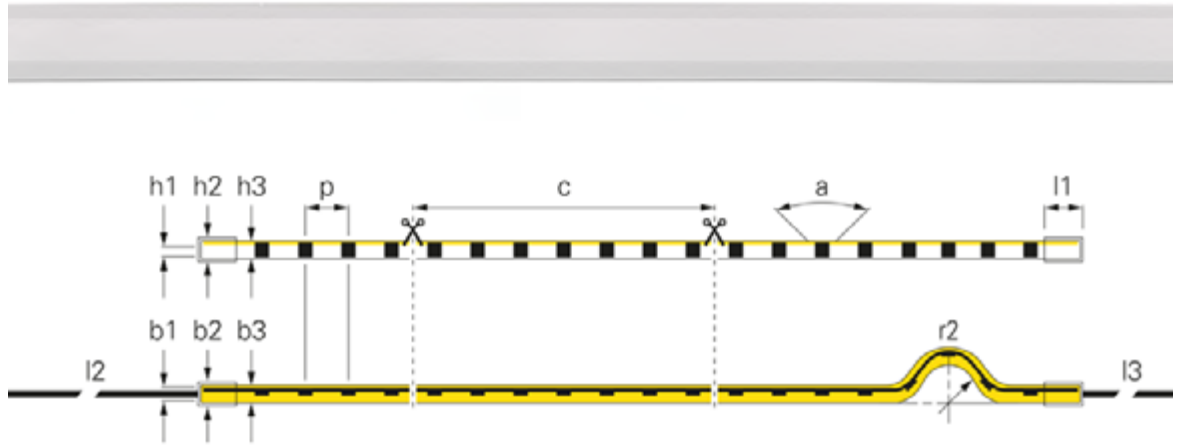

- spot-free homogeneous illumination
- very easy installation using adapted profile
- UV and salt water-resistant IP68
- ultra-flexible and therefore very versatile
- light-fast polyurethane encapsulation

(a) Light Beam Angle	125 Degree	(l3) Secondary Cable Length	3 m
(r1) Bending Radius min.	150 mm	Length	5000 mm
(h1) Height	20 mm	Rated Input 1m	10.5 W
(h2) Height End Cap	23 mm	Rated Input Voltage	24 V/DC
(h3) Length Hose	20 mm	Colour Rendering Index (Ra)	80
(b1) Width	12 mm	Control	Dimmable via optional controller
(b2) Width end cap	15 mm	Type of IP Protection	PVC cover
(b3) Width hose	12 mm	Working Temperature	-25 to 45 °C
(l1) Length End Cap	8 mm		
(l2) Primary Cable Length	3 m		

Article	Colour Temperature	(p) LED Distance	(c) Segment Length	Luminous Efficiency 1m	Luminous Flux 1m	Price
840287	3000 K	6.94 mm	100 mm	35.05 lm/W	368 lm	€ 799.95
840290	3200 K	11.91 mm	166.66 mm	20 lm/W	210 lm	€ 799.95



Accessories

930447	Profile for D Flex Line SIDE		€ 14.95
930451	Flex profile for D Flex Line Side		€ 26.95
930532	Mounting set for D Flex Line 12,0 x 20,0 mm		€ 9.95
930593	Gel glue for gluing end caps, 3g		€ 5.95