



NEON 24V-10W D FLEX LINE TOP-VIEW IP68

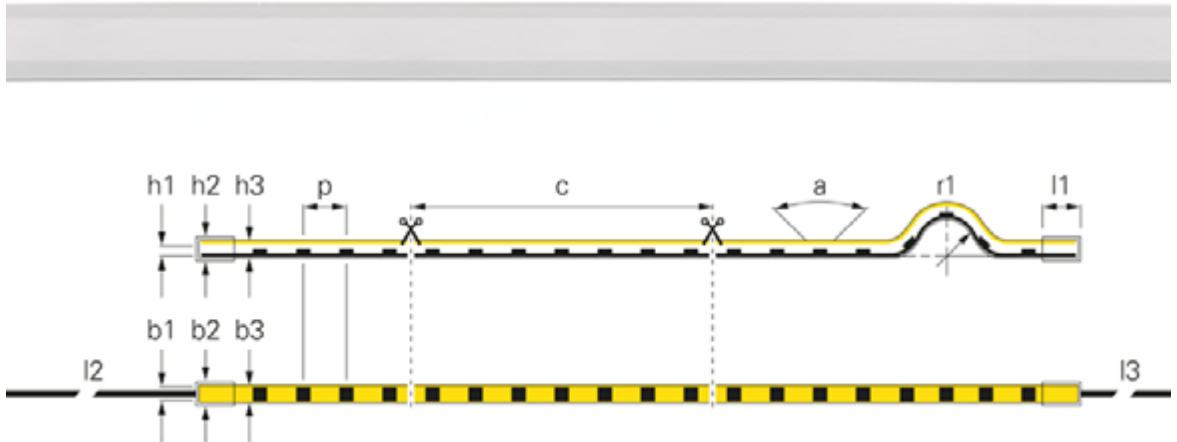

- spot-free homogeneous illumination
- very easy installation using adapted profile
- UV and salt water-resistant IP68
- ultra-flexible and therefore very versatile
- light-fast polyurethane encapsulation

(p) LED Distance	6.94 mm	Colour Temperature	3000 K
(c) Segment Length	166.66 mm	Luminous Efficiency 1m	49.05 lm/W
(a) Light Beam Angle	117 Degree	Luminous Flux 1m	515 lm
(r1) Bending Radius min.	150 mm	Length	5000 mm
(h1) Height	15 mm	Rated Input 1m	10.5W
(h2) Height End Cap	18 mm	Rated Input Voltage	24 V/DC
(h3) Length Hose	15 mm	Colour Rendering Index (Ra)	80
(b1) Width	16 mm	Control	Dimmable via optional controller
(b2) Width end cap	19 mm	Type of IP Protection	PVC cover
(b3) Width hose	16 mm	Working Temperature	-25 to 45 °C
(l1) Length End Cap	8 mm	Channels	1
(l2) Primary Cable Length	3 m		
(l3) Secondary Cable Length	3 m		

Article	Price
840288	€ 749.95



Accessories

930448	Profile for D Flex Line TOP		€ 14.94
930449	Profile for D Flex Line TOP		€ 11.95
930533	Mounting set for D Flex Line 16,0 x 15,0 mm		€ 10.95
930593	Gel glue for gluing end caps, 3g		€ 5.95