NEON 24V-10W D FLEX LINE TOP-VIEW WIDE IP68

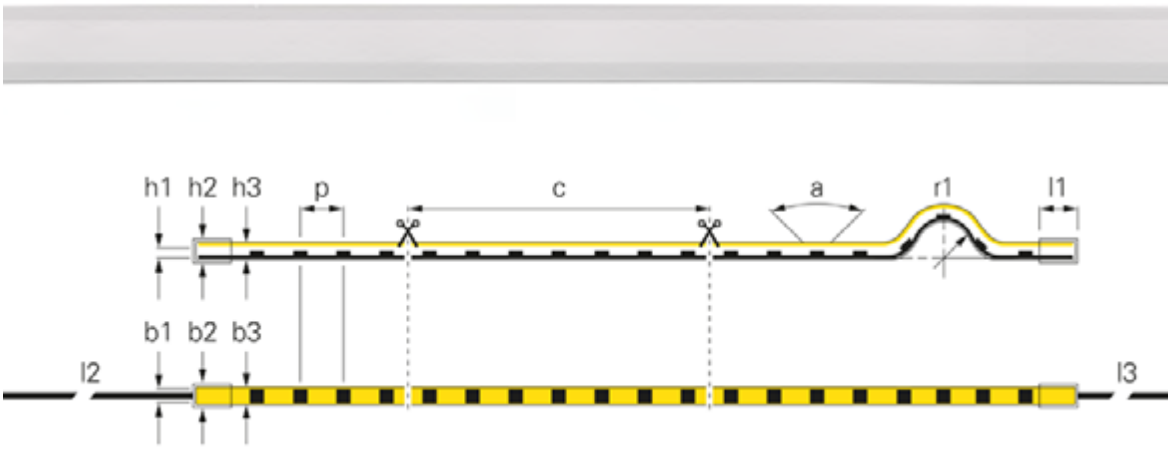

- **spot-free homogeneous illumination**
- **very easy installation using adapted profile**
- **UV and salt water-resistant IP68**
- **ultra-flexible and therefore very versatile**
- **light-fast polyurethane encapsulation**

(p) LED Distance	6.94 mm
(c) Segment Length	100 mm
(a) Light Beam Angle	180 Degree
(r1) Bending Radius min.	150 mm
(h1) Height	10 mm
(h2) Height End Cap	13 mm
(h3) Length Hose	10 mm
(b1) Width	10 mm
(b2) Width end cap	13 mm
(b3) Width hose	10 mm
(l1) Length End Cap	8 mm
(l2) Primary Cable Length	3 m
(l3) Secondary Cable Length	3 m

Colour Temperature	3000 K
Luminous Efficiency 1m	69.52 lm/W
Luminous Flux 1m	730 lm
Length	5000 mm
Rated Input 1m	10.5 W
Rated Input Voltage	24 V/DC
Colour Rendering Index (Ra)	80
Control	Dimmable via optional controller
Type of IP Protection	PVC cover
Working Temperature	-25 to 45 °C
Channels	1

Article		Price
840285	WW	**€ 479.95**

CV | 1 CH | IP68 max.2m | III | A↑G | G

Accessories

930445	Profile for D Flex Line MINI		**€ 10.95**
930446	Profile for D Flex Line MINI		**€ 14.94**
930531	Mounting set for D Flex Line 10,0 x 10,0 mm		**€ 10.95**