




NEON 24V-8W OMNIFLEX MINI IP67

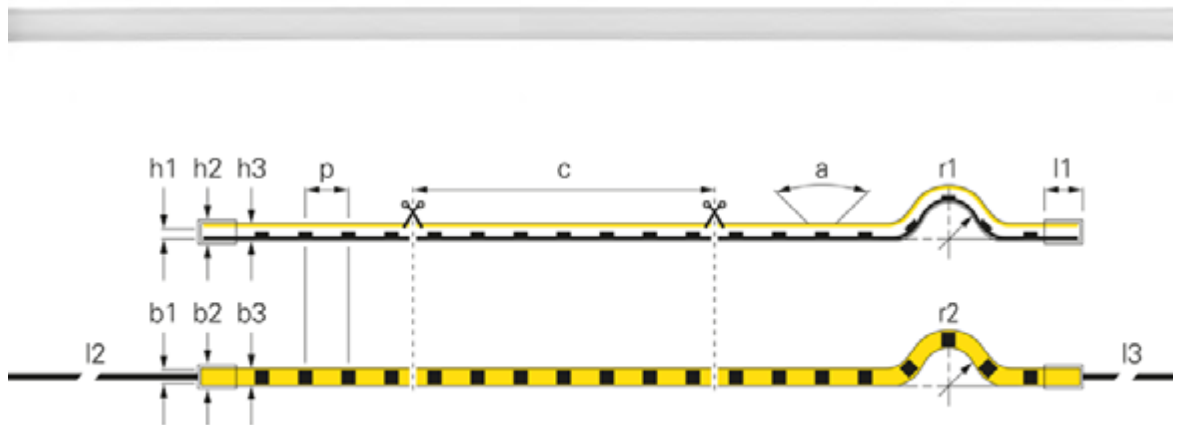

- spot-free light pattern for homogeneous illumination
- Neon effect
- small bending radii in all directions provide a great deal of freedom
- Minimum forward bending radius: 60 mm/to the side: 100 mm
- 300 cm long primary and secondary infeed
- Resistant to salt water and UV rays
- comprehensive range of accessories enables you to shape your design as desired

(p) LED Distance	6.25 mm	(l2) Primary Cable Length	3 m
(c) Segment Length	100 mm	(l3) Secondary Cable Length	3 m
(a) Light Beam Angle	120 Degree	Length	5000 mm
(r1) Bending Radius min.	100 mm	Rated Input 1m	8 W
(r2) Bending Radius Left / Right	60 mm	Rated Input Voltage	24 V/DC
(h1) Height	2 mm	Colour Rendering Index (Ra)	80
(h2) Height End Cap	11 mm	Control	Dimmable via optional controller
(h3) Length Hose	10 mm	Type of IP Protection	Silicone hose
(b1) Width	4.7 mm	Working Temperature	-10 to 55 °C
(b2) Width end cap	11 mm	Channels	1
(b3) Width hose	10 mm		
(l1) Length End Cap	4.5 mm		

Article	Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	EEL	Price
840417	2700 K	90 lm/W	720 lm		€ 299.95
840418	3000 K	93 lm/W	744 lm		€ 299.95
840419	4000 K	100 lm/W	800 lm		€ 299.95

