
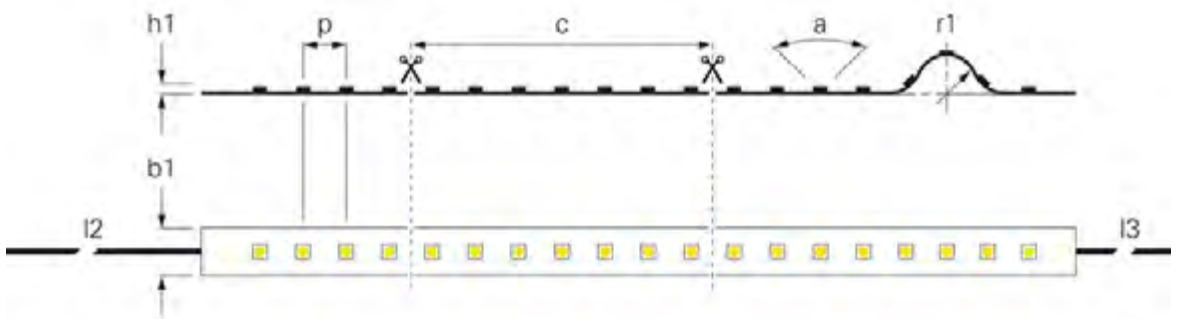


SMD 48V-4W LONG RUN IP20



(p) LED Distance	12.82 mm	Rated Input 1m	4 W
(a) Light Beam Angle	120 Degree	Rated Input Voltage	48 V/DC
(r1) Bending Radius min.	50 mm	Colour Rendering Index (Ra)	80
(h1) Height	1 mm	Control	Dimmable via optional controller
(b1) Width	10 mm	Working Temperature	-15 to 50 °C
(l2) Primary Cable Length	1 m	Channels	1
(l3) Secondary Cable Length	1 m		

Article	Colour Temperature	(c) Segment Length	Luminous Efficiency 1m	Luminous Flux 1m	Length	Price
840318	WW 3000 K	25 mm	121 lm/W	485 lm	15000 mm	€ 289.95
840337	WW 3000 K	100 mm	121 lm/W	485 lm	50000 mm	€ 999.95
840320	NW 4000 K	25 mm	133 lm/W	530 lm	15000 mm	€ 289.95
840339	NW 4000 K	100 mm	133 lm/W	530 lm	50000 mm	€ 999.95

**Lighting design**

Interested in our lighting design service?

Your contact person will be happy to answer any questions you may have.