





SMD 48V-4W LONG RUN IP44

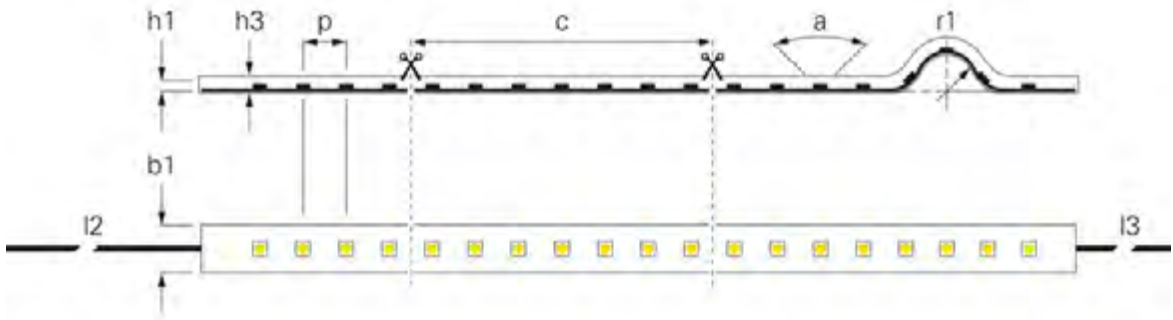

(p) LED Distance	12.82 mm	(I3) Secondary Cable Length	1 m
(a) Light Beam Angle	120 Degree	Rated Input 1m	4 W
(r1) Bending Radius min.	50 mm	Rated Input Voltage	48 V/DC
(h1) Height	1 mm	Colour Rendering Index (Ra)	80
(h3) Length Hose	2 mm	Control	Dimmable via optional controller
(b1) Width	10 mm	Type of IP Protection	Silicone
(b3) Width hose	12 mm	Channels	1
(I2) Primary Cable Length	1 m		

Article	Colour Temperature	(c) Segment Length	Luminous Efficiency 1m	Luminous Flux 1m	Length	Price
840317	WW 3000 K	25 mm	100 lm/W	400 lm	15000 mm	€ 349.95
840338	WW 3000 K	100 mm	100 lm/W	400 lm	50000 mm	€ 1124.95
840319	NW 4000 K	25 mm	114 lm/W	455 lm	15000 mm	€ 349.95
840340	NW 4000 K	100 mm	114 lm/W	455 lm	50000 mm	€ 1124.95



Aluminium profiles

In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.