


SMD 48V-10W LONG RUN IP20

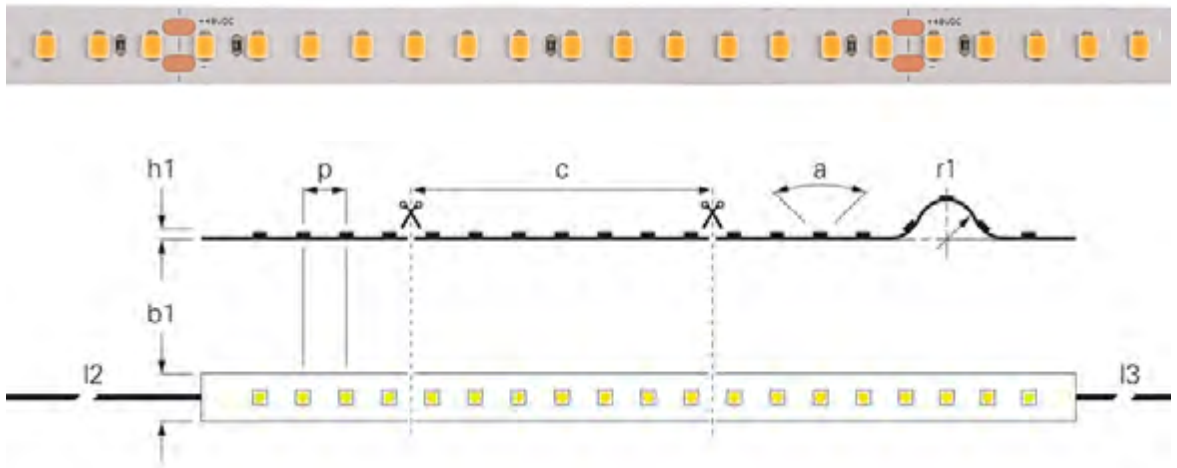

(p) LED Distance	7.14 mm	(l3) Secondary Cable Length	1 m
(c) Segment Length	100 mm	Rated Input 1m	10 W
(a) Light Beam Angle	120 Degree	Rated Input Voltage	48 V/DC
(r1) Bending Radius min.	50 mm	Control	Dimmable via optional controller
(h1) Height	2 mm	Working Temperature	-10 to 55 °C
(b1) Width	10 mm		
(l2) Primary Cable Length	1 m		

Article	Colour Temperature	Luminous Flux 1m	Length	Colour Rendering Index (Ra)	Channels	EEL	Price
840399	RGB	510 lm	15000 mm	65	3		€ 449.95
840407	RGB	510 lm	50000 mm	65	3		€ 1499.95
840393	WW 2700 K	1210 lm	15000 mm	90	1		€ 399.95
840401	WW 2700 K	1210 lm	50000 mm	90	1		€ 1299.95
840394	WW 3000 K	1240 lm	15000 mm	90	1		€ 399.95
840402	WW 3000 K	1240 lm	50000 mm	90	1		€ 1299.95
840395	NW 4000 K	1300 lm	15000 mm	90	1		€ 399.95
840403	NW 4000 K	1300 lm	50000 mm	90	1		€ 1299.95

**Power supply units**

You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.