




SMD 48V-10W LONG RUN IP67

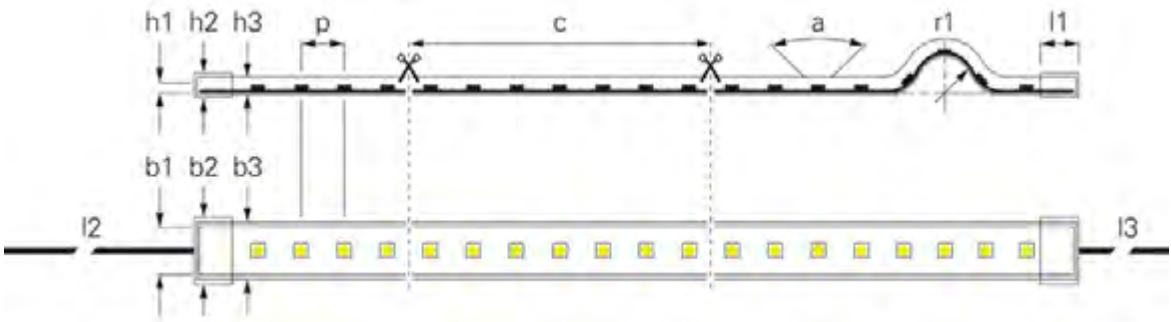

- Ideal for covered lighting and long running lengths
- Up to 50 m in single section with single-/double-sided infeed
- Powerful adhesive tape 3M 300 LSE (IP20)/3M VHB 5604A with primer pre-treatment (IP67)

| | | | |
|--------------------------|------------|-----------------------------|----------------------------------|
| (p) LED Distance | 7.14 mm | (l1) Length End Cap | 10 mm |
| (c) Segment Length | 100 mm | (l2) Primary Cable Length | 1 m |
| (a) Light Beam Angle | 120 Degree | (l3) Secondary Cable Length | 1 m |
| (r1) Bending Radius min. | 50 mm | Rated Input 1m | 10 W |
| (h1) Height | 1,7 mm | Rated Input Voltage | 48 V/DC |
| (h2) Height End Cap | 6.5 mm | Control | Dimmable via optional controller |
| (h3) Length Hose | 5 mm | Type of IP Protection | Silicone hose |
| (b1) Width | 10 mm | Working Temperature | -10 to 55 °C |
| (b2) Width end cap | 14.2 mm | | |
| (b3) Width hose | 12 mm | | |

| Article | Colour Temperature | Luminous Flux 1m | Length | Colour Rendering Index (Ra) | Channels | EEL | Price |
|---------------|--------------------|------------------|----------|-----------------------------|----------|-----|-----------|
| 840400 | RGB | 450 lm | 15000 mm | 65 | 3 | | € 524.95 |
| 840408 | RGB | 450 lm | 50000 mm | 65 | 3 | | € 1749.95 |
| 840396 | WW 2700 K | 1090 lm | 15000 mm | 90 | 1 | | € 474.95 |
| 840404 | WW 2700 K | 1090 lm | 50000 mm | 90 | 1 | | € 1549.95 |
| 840397 | WW 3000 K | 1120 lm | 15000 mm | 90 | 1 | | € 474.95 |
| 840405 | WW 3000 K | 1120 lm | 50000 mm | 90 | 1 | | € 1549.95 |
| 840398 | NW 4000 K | 1180 lm | 15000 mm | 90 | 1 | | € 474.95 |
| 840406 | NW 4000 K | 1180 lm | 50000 mm | 90 | 1 | | € 1549.95 |

