




SMD 230V-14W LONG RUN IP65

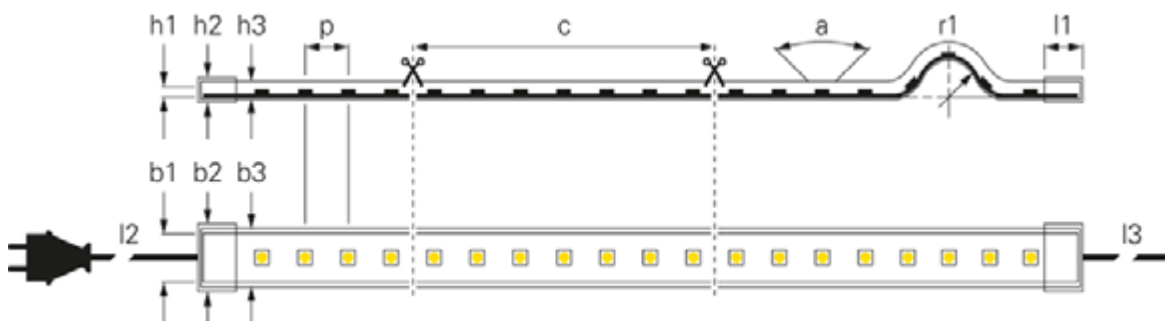

- 230V direct connection
- ready for connection with IP 44 contour plug and end cap
- Total length to be operated up to 50 m

(p) LED Distance	11.9 mm	(l3) Secondary Cable Length	3 m
(a) Light Beam Angle	120 Degree	Rated Input 1m	14 W
(r1) Bending Radius min.	150 mm	Rated Input Voltage	220-240 V/AC
(h1) Height	7.8 mm	Colour Rendering Index (Ra)	80
(h2) Height End Cap	18 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
(h3) Length Hose	13.2 mm	Type of IP Protection	PVC cover
(b1) Width	17 mm	IP Protection Type Plug	IP 44
(b2) Width end cap	21,8 mm	Working Temperature	-10 to 60 °C
(b3) Width hose	17 mm	Channels	1
(l1) Length End Cap	18 mm		
(l2) Primary Cable Length	3 m		

Article	Colour Temperature	(c) Segment Length	Luminous Efficiency 1m	Luminous Flux 1m	Length	EEL	Price
840390	WW 2700 K	170 mm	103 lm/W	1442 lm	15000 mm		€ 769.95
840391	WW 2700 K	170 mm	103 lm/W	1442 lm	50000 mm		€ 2499.95
840386	WW 3000 K	166.66 mm	105 lm/W	1470 lm	15000 mm		€ 769.95
840387	WW 3000 K	166.66 mm	105 lm/W	1470 lm	50000 mm		€ 2499.95
840388	NW 4000 K	170 mm	114 lm/W	1596 lm	15000 mm		€ 769.95
840389	NW 4000 K	170 mm	114 lm/W	1596 lm	50000 mm		€ 2499.95

