

DEEP FIX IP44

14-Aug.-2018

1.0 LED

LED 7/10W | 350-500mA | COB 3-step | excl. power supply | 18Vf
 CE IP44 960° 0.3m 36°

white texture	112661W_
silver / grey	112661S_
black texture	112661B_
white texture (blade springs)	112661W_C

LIGHT COLOUR

2700K >90CRI 420-590lm	3
3000K >90CRI 470-640lm	5
1800-2850K >95CRI 320-440lm	9

ALWAYS USE

for power supplies see our catalogue

1.0 MR16

QR-CBC51 Max. 35W | GU5.3 | 12V | excl. power supply
 CE IP44 0.9m 36°

white texture	112610W0
silver / grey	112610S0
black texture	112610B0
white texture (blade springs)	112610W0C

ALWAYS USE


for power supplies see our catalogue

1.0 PAR16



Max. 35W | GU10 | 100-240VAC | 50-60Hz
 CE IP44 960° 0.9m 36°

OPTIONAL: PAR16 LED GU10 6W | phase-cut dim : 2700K 390lm | 3000K 410lm
 PAR16 LED GU10 7W ambient white dim : 1800-3000K

white texture	112620W0
silver / grey	112620S0
black texture	112620B0
white texture (blade springs)	112620W0C



IP RATING when installed.
 (Fixture is IP20 for the recessed part & IP44 at the visible side)

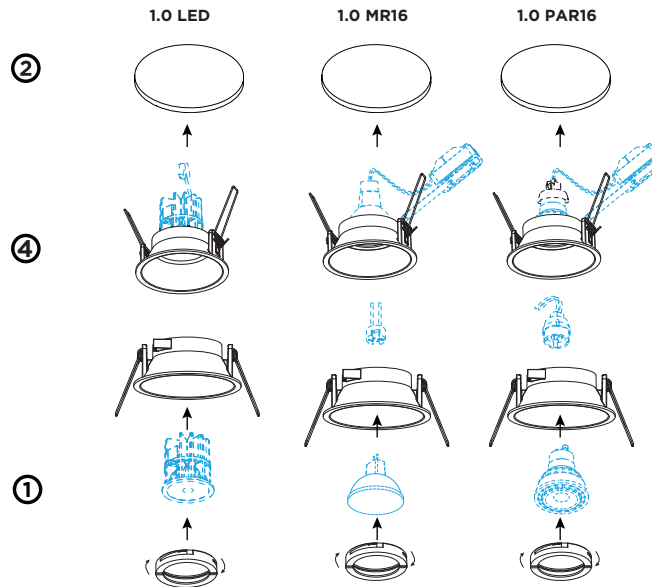


FOR HALOGEN LAMPS:


1. The mounting height for the luminaire should be more than 2.5m.
2. Luminaires not suitable for covering with thermally insulating material.
3. Luminaires not suitable for direct mounting on normally flammable surfaces (suitable only for mounting on non-combustible surfaces)

DIMENSIONS

Wired springs:

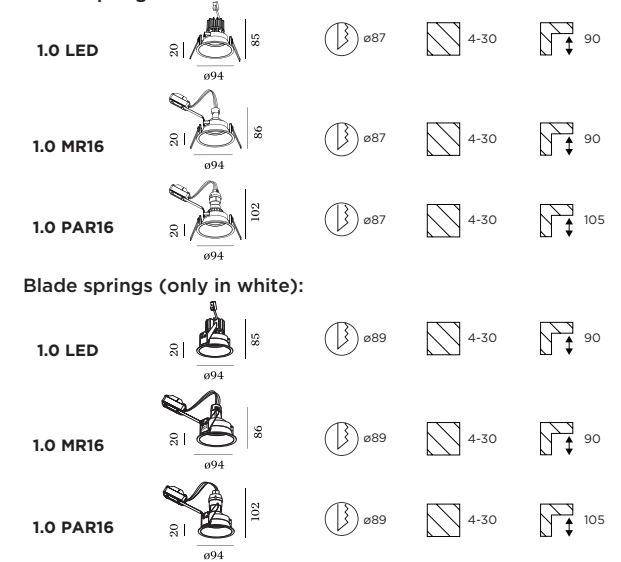

Blade springs (only in white):

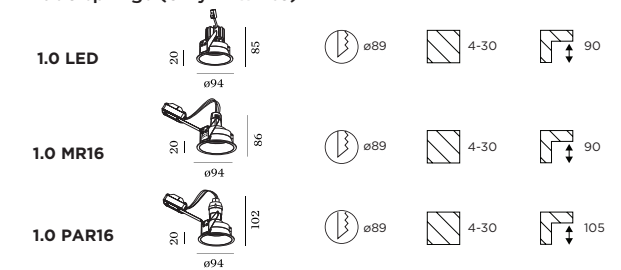

MOUNTING INSTRUCTION

- 1 Put the illuminant in the assembled cover.
- 2 Make a hole in the ceiling according to the prescribed dimensions.
- 3 **POWER CONNECTION**
 SERIAL CONNECTION - for LED
 Always use **POWER SUPPLY** according to the specifications of the LED-module

 PARALLEL CONNECTION - for PAR16
- 4 Turn the springs and insert the fixture in the ceiling hole